

Install Instructions for PRP's Wildcat Steel Frame Doors



Parts Included:

- 2 PRP Wildcat Steel Frame Doors (with skins and latches attached)
- 2 Latch Pin Brackets
- 4 Bolts for Brackets
- 4 Washers for Brackets
- 2 Latch Pin Bolts
- 2 Latch Pin Nuts
- 2 Latch Pin Sleeves

Tools Needed: (not included)

- Torx driver
- 5/32 allen wrench (for door skin bolt)
- 7/16" wrench and/or ratchet (x2)

Remove all parts from the box and unwrap completely using the box top to lay out the pieces.

Time:

Approx 30–45 minutes.

Read through all of the instructions completely before beginning to install your PRP Wildcat Steel Doors.



1. Remove the seat

Reach behind the bottom cushion and release the latch. Lift seat forward then up and out of the front floor bracket.



2. Remove safety netting bolts (2)

Using the torx driver, remove the bolts from the upper and lower safety netting tabs connected to the vehicle frame. Put them aside for now (a good place is the cup holder). You will use one of these bolts to install the limit straps later.



3. Remove hinge bolts (2)

Using the torx driver, remove the bolts from the hinge bracket. Put them aside for now. You *will* use them to install the doors.



4. Remove stock latch

Using the torx driver, remove the 2 bolts from the latch bracket. You will not use these bolts to install the replacement bracket.






5. Install PRP latch pin bracket

Using the supplied bolts and washers install the latch pin bracket. Only hand tighten for now. You may need to make adjustments later.




6. Install latch pin

Slide the latch pin sleeve over the latch pin bolt and install on bracket with the supplied nut. Leave latch pin loose. You will need to make adjustments later.

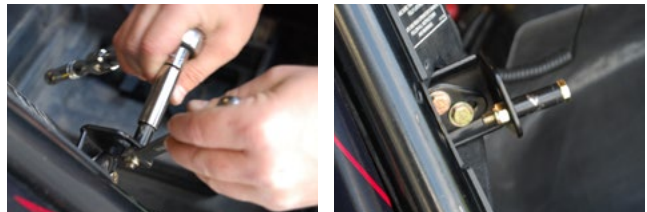

7. Install door limit strap

Using a torx screw from the removal of the netting, install the limit strap on the underside of the bracket along the bottom of the door frame. Tighten completely.

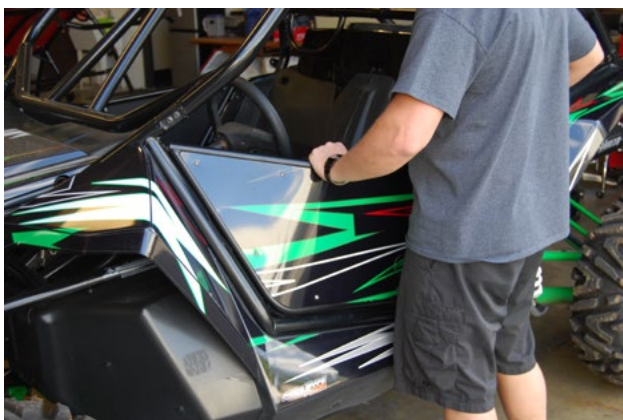

8. Place PRP Wildcat Steel Doors

Carefully place the doors in the door frame making sure the hinge bracket is around the door frame bracket and the slam latch is on the latch pin.



9. Secure the hinge bracket

Using the screws removed from the original door bracket (check the cup holder) install the door hinge making it snug but not completely tightened. You may need to adjust the positioning slightly.



10. Install limit strap on the door

Using an allen wrench, remove the bottom screw holding on the door skin which is closest to the hinge. Replace the screw through the washer of the limit strap and tighten completely.



11. Check and adjust slam latch and hinge positions

Gently close the door and completely close the slam latch. Adjust door so the pin is as straight as possible then tighten the hinge bolts. While holding the slam latch pin in place, open the door and tighten the pin. Gently close the door to make sure the latch strikes the pin straight on and no binding occurs. Continue adjustments as necessary. You may need to make small adjustments several times.



12. Repeat on the opposite side...

Congratulations! Your new PRP Wildcat Steel Doors are installed and ready to use.

If you have any questions or experience issues, please contact your retail outlet first for help. However, the staff at PRP is always happy to help at **1-800-317-6253**.

Thank you! Ride Safe!